

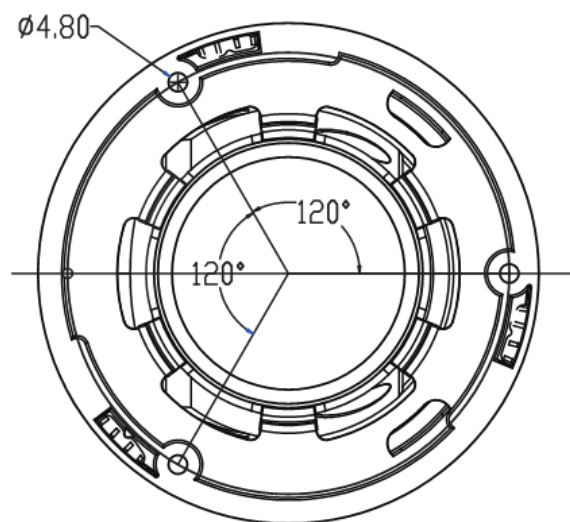


Model: GX-CV725A-28-AI-AD

5MP dual light source VCA Smart AI turret IP Camera with two way audio

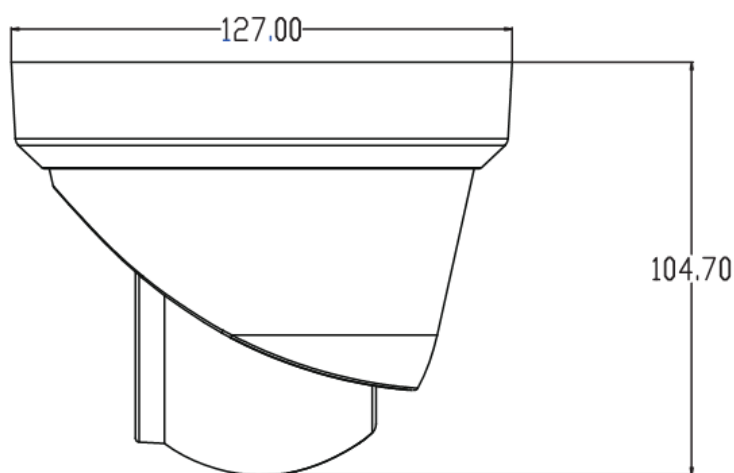

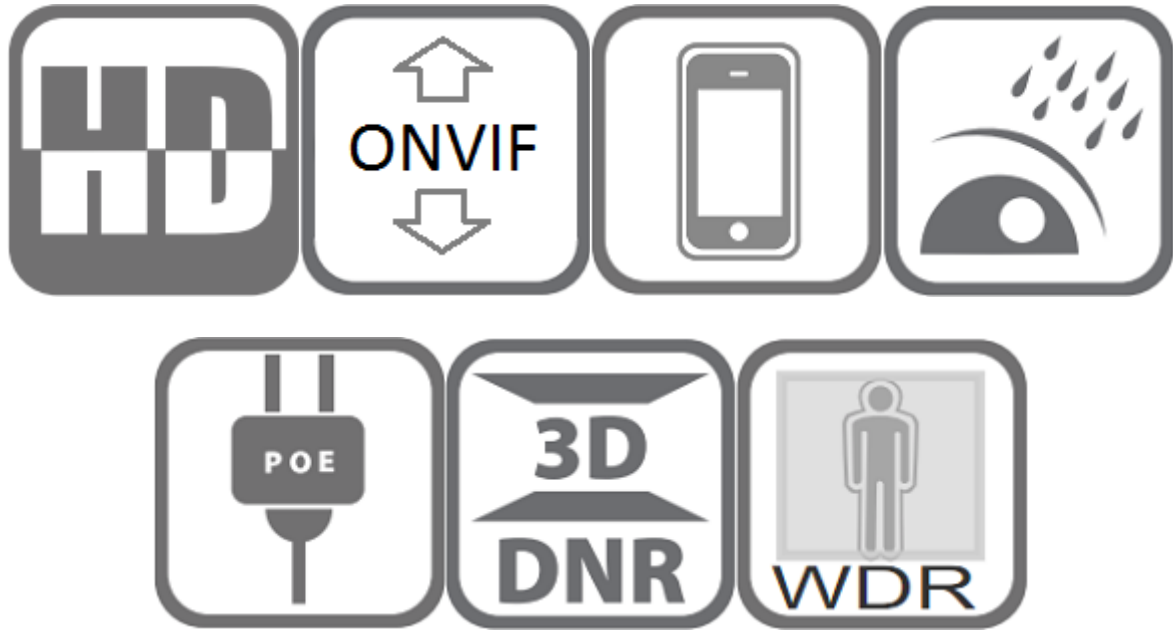

Features:

- 1/2.7" 5MP CMOS sensor
- 5MP HD resolution 2880*1620@25fps Smart encoding
- Ultra low illumination 0.01Lux
- 2-Exposure Line WDR upto 100dB
- Scenes switching, Day/Night (ICR), AWB, 2D/3D-DNR, Rotation 90°
- Slow Shutter, light control, White Balance, Defog
- OSD , Privacy Mask, ROI, Watermark
- Smart Intelligent Cross Line, Enter Area, Leave Area, Intrusion, People Flow Counting, Crowd Density Monitoring
- RTSP and Onvif 17.06 compatible
- Common event Motion Detection, Tampering Alarm, Audio Detection
- H.265/H.264 three-stream media server
- Easy-to-use P2P Cloud service
- Multi web browser, PC Client, mobile APP remote access
- RJ45 100mbps network port, IEEE802.3af PoE
- Lightning protection 4000V
- Strong water-proof housing, IP67
- Two way audio, Built in Microphone and Speaker ,
- 2PCS dual Lights,IR distance:25-30M,Warm light distance:25-30M
- HD 2.8mm F1.6 lens
- SD Slot, max support 256GB TF card
- Reset button

Technical Specifications:

Model	GX-CV725A-28-AI-AD
Camera	
Image Sensor	1/2.7" 5MP CMOS
Effective Pixels	2888H x 1628V
Electronic Shutter	AUTO, 1/25s ~ 1/100000s
Min. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	2-Exposure Line WDR upto 120dB
White Balance	Auto/Manual
AGC/BLC/HLC	Support
DNR	2D/3D DNR
Other	Multi-lines OSD, Privacy Mask, ROI, Watermark, Low Shutter, Scenes
Encode	
Video Standard	Ultra 265, H.265, H.264, MJPEG
Video Resolution	Main Stream: 25fps@5MP(2880x1620)/4MP(2560x1440), 30fps@3MP(2304x1296)/1080P Sub stream: 30fps@720P/D1/640x360/CIF Third stream: D1, 640x360,CIF
Video Bitrates	128kbps – 6144kbps, VBR/CBR
Audio Standard	G.711-u/G.711-a
Built-in Mic	Yes
Built-in Speaker	Yes
Intelligent Detection	Human Detection, Vehicle Detection Cross Line, Enter Area, Leave Area, Intrusion, People Flow Counting, Crowd Density Monitoring
Leds and distance	
Leds	2PCS dual Light LEDs
Warm light distance	25-30 M
IR Distance	25-30 M
Lens	
Focal length	HD 2.8mm F1.6 lens
Angle of View (H)	91.3°
Angle of View (V)	46.1°
Angle of View (D)	109.6°
Record	
SD Slot	Max support 256GB TF card
Network Services	
Protocol	HTTP(s)/IPv6/TCP/UDP/RTP/RTSP/FTP/SMTP/DDNS/DHCP/PPPoE/NTP, etc.
P2P	Yes
Web	IE, Firefox, Chrome, Edge, Safari, etc.
Media	CMS, Android, IOS

ONVIF	17.06 compatible
General	
Network Port	POE ,1-RJ45, 100Mbps
Power Supply	12 VDC ± 10%
Power Consumption	< 5 W
Operating Temp.	-30°C -(+60)°C, 10%-90%RH