

Network Video Recorder

NVR824 Series



Key Features


- Support Ultra 265/H.265/H.264 video formats
- 128/256-channel input
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile C, Profile Q, Profile A, Profile T
- Support 2-ch HDMI, 1-ch VGA, HDMI at up to 4K(3840x2160) resolution
- HDMI1, HDMI2 and VGA independent outputs provided
- Up to 12 Megapixels resolution recording
- Redundant power supply optional
- Support HDD hot swap with RAID 0, 1, 5, 6, 10, 50, 60 storage scheme configurable
- 24 SATA HDDs, up to 16TB for each HDD
- Support 2 miniSAS Interfaces
- Support 12V power output
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade
- Support N+1 Hot spare

Specifications


Model	NVR824-128R		NVR824-256R	
Video/Audio Input				
IP Video Input	128-ch		256-ch	
Two-way Audio Input	1-ch, RCA			
Network				
Incoming Bandwidth	768Mbps			
Outgoing Bandwidth	768Mbps			
Remote Users	128		256	
Protocols	P2P, UPnP, NTP, DHCP, PPPoE			
Video/Audio Output				
HDMI/VGA Output	VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz HDMI1/HDMI2: 4K (3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz			
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF			
Audio Output	1-ch, RCA			
Synchronous Playback	16-ch			
Corridor Mode Screen	3/4/5/7/9/10/12/16/32			
Decoding				
Decoding format	Ultra 265, H.265, H.264			
Live view/Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF			
Capability	5 x 4K@30, 20 x 1080P@30, 24 x 1080P@25, 40 x 960P@25, 45 x 720P@30, 54 x 720P@25, 96 x D1			
Hard Disk				
SATA	24 SATA interfaces			
Capacity	Up to 16TB for each HDD (The maximum HDD capacity varies with environment temperature)			
Extension board	4			
miniSAS*	2 miniSAS ports			
eSATA	1			
Smart				
VCA Detection	Intrusion Detection, Cross Line Detection, Enter Area, Leave Area, Defocus Detection, Scene Change Detection, Object Left Behind, Object Removed, Auto Tracking, Ultra Motion Detection(UMD)			
VCA Search	Behavior Search, Vehicle Search			
People Counting	People Flow Counting, Crowd Density Monitoring			
Smart Intrusion Prevention (SIP), Vehicle Detection, UMD by Camera	Total 64-ch			
Disk Array				
Array Type	RAID 0/1/5/6/10/50/60			
External Interface				
Network Interface	4 RJ-45 10M/100M/1000M adaptive Ethernet Interface			
Serial Interface	1 x RS232, 1 x RS485			

USB Interface	Front panel: 2 x USB2.0, Rear panel: 2 x USB3.0
Alarm In	24-ch
Alarm Out	8-ch
Power Output	12V
General	
Power Supply	100 ~ 240V AC Power Consumption: ≤ 70 W (without HDD)
Working Environment	-10°C ~ + 50°C (+14°F ~ +122°F), Humidity ≤ 90% RH (non-condensing)
Dimensions	533mm × 484.6mm × 175.5mm (21.0" × 19.1" × 6.9")
Weight (without HDD)	≤ 12.5 Kg (27.56 lb)

Dimensions

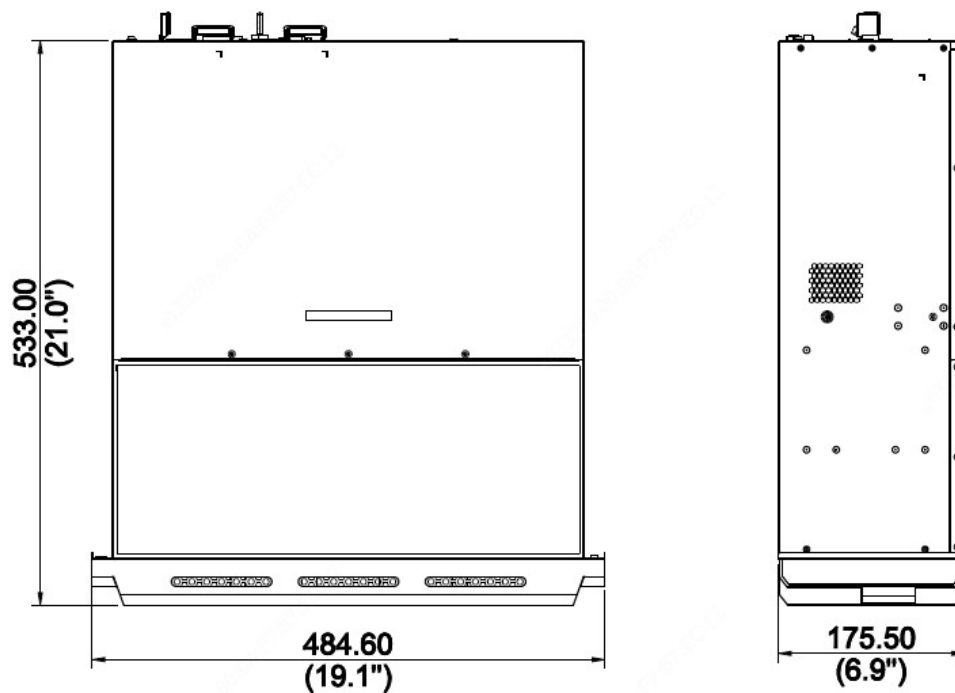

Rear Panel

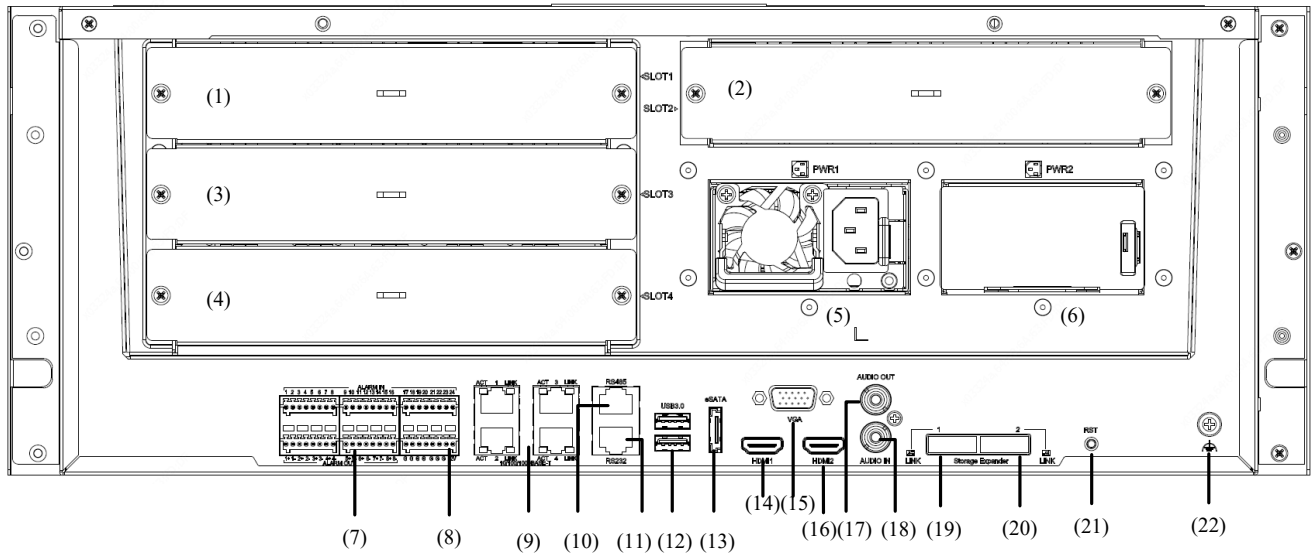

NVR824

(1) Slot1	(2) Slot2	(3) Slot3
(4) Slot4	(5) Power Supply 1	(6) Power Supply 2(optional)
(7) Alarm in/out	(8) 12V DC Output	(9) Network Interface
(10) RS485	(11) RS232	(12) USB3.0
(13) eSATA	(14) HDMI1 Output	(15) VGA Output
(16) HDMI2 Output	(17) Audio Output	(18) Audio Input
(19) miniSAS	(20) miniSAS	(21) RST
(22) GND		