

DE3000-V2 Series Disk Enclosure

Overview

DE3000-V2 Series, with high performance, high reliability, high density, high scalability, is an affordable high-level disk enclosure developed especially for video surveillance.

Features

High-Quality Hardware Design




- **high performance**
12Gbps SAS-3 technology provides superior performance experience
- **High density**
The innovative enclosure with 981mm depth and 4U height that holds up to 60 disks, is space-saving and applicable to the standard rack-mounted scenarios.
- **Redundant power supplies**
The hot-swappable power supply is designed in redundancy and load balancing mode. Automatic power switching in case of failure and online replacement of failed power supply are supported.
- **Power protection**
Disk powered on sequentially during system startup, protection from impulse current.
- **Multistage fan speed and energy saving**
Fans with multistage speed are configured in the hot-swappable frame in redundancy mode. System power consumption can be balanced intelligently with heat dissipation calculation to ensure low power consumption and stable operation of the system.

Specifications




Item	DE3124-V2	DE3148-V2	DE3160-V2	DE3160-V2@S
Cooperate with	VX3024-V2	VX3048-V2	VX3060-V2	VX3060-V2@S
Management Interface	2Serial port			
Back-end Expansion Interface	4-port 4*12Gbps Mini SAS HD (Primary) 4-port 2*12Gbps Mini SAS HD (Backup)	4-port 4*12Gbps Mini SAS HD	4-port 4*12Gbps Mini SAS HD	2-port 4*12Gbps Mini SAS HD
HDD	24SATA/SAS/NL SAS Interfaces	48SATA/SAS/NL SAS Interfaces	60SATA/SAS/NL SAS Interfaces	60SATA/SAS/NL SAS Interfaces
Disk Capacity	1 TB, 2 TB, 3 TB, 4 TB , 5 TB, 6 TB,8TB,10TB, 12TB,14TB			
Dimension (W x D x H)	482.0mm × 589.0mm × 175.0 mm	482.0mm × 801.0mm × 178.0 mm Note: for cabinet with 1000mm depth or above	480.6mm× 981.0mm × 178.0 mm Note: for cabinet with 1200mm depth or above	
Power Consumption	270W (fully loaded)	450W (fully loaded)	700W (fully loaded)	700W (fully loaded)
Power Supply	100V – 127V/200V – 240V AC; 60Hz/50Hz			
Weight	Fully loaded: < 40kg	Fully loaded: < 61 kg	Fully loaded: < 92 kg	Fully loaded: <90 kg
Authentication certificate	CE, FCC, UL			
Operating temperature	5°C ~ 40°C / 41°F ~ 104°F			
Recommended temperature	10 °C~ 35 °C / 50°F ~ 95°F			
Humidity	20%~80% RH (non-condensing)			

Dimensions


DE3124-V2

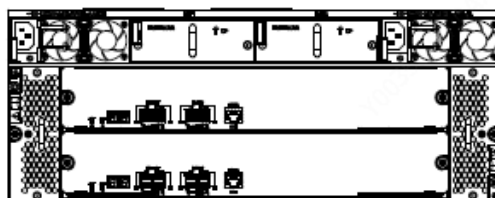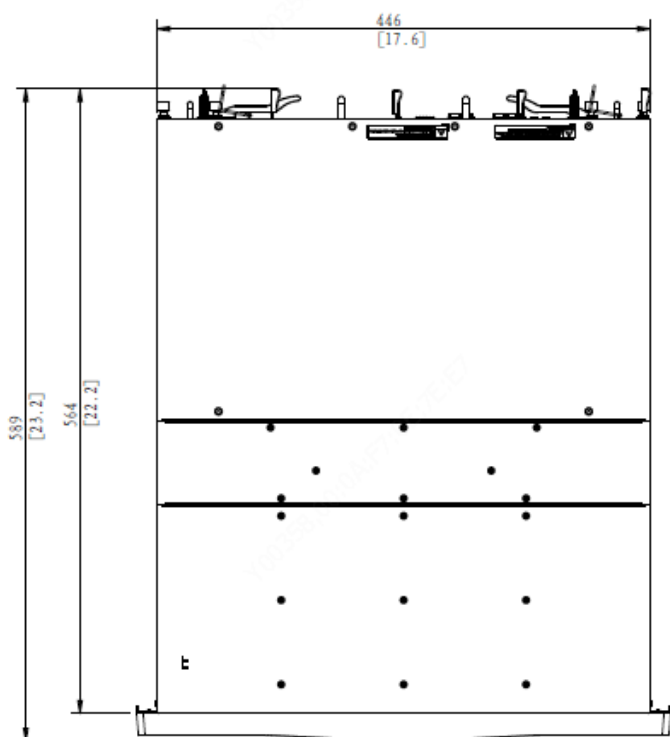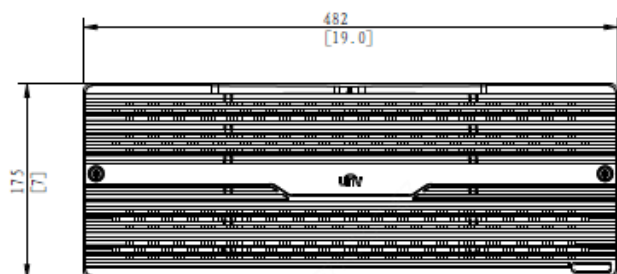


DE3148-V2

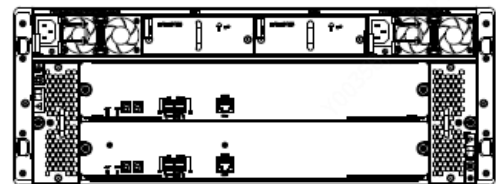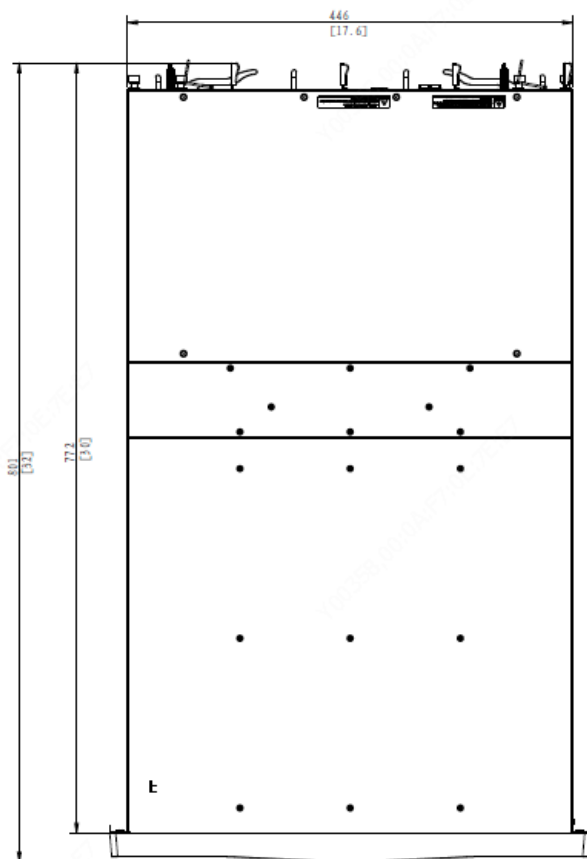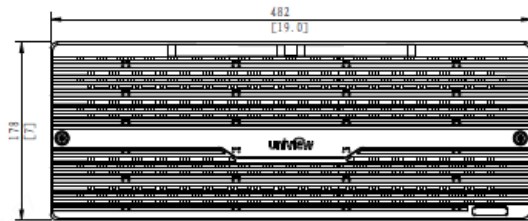

DE3160-V2

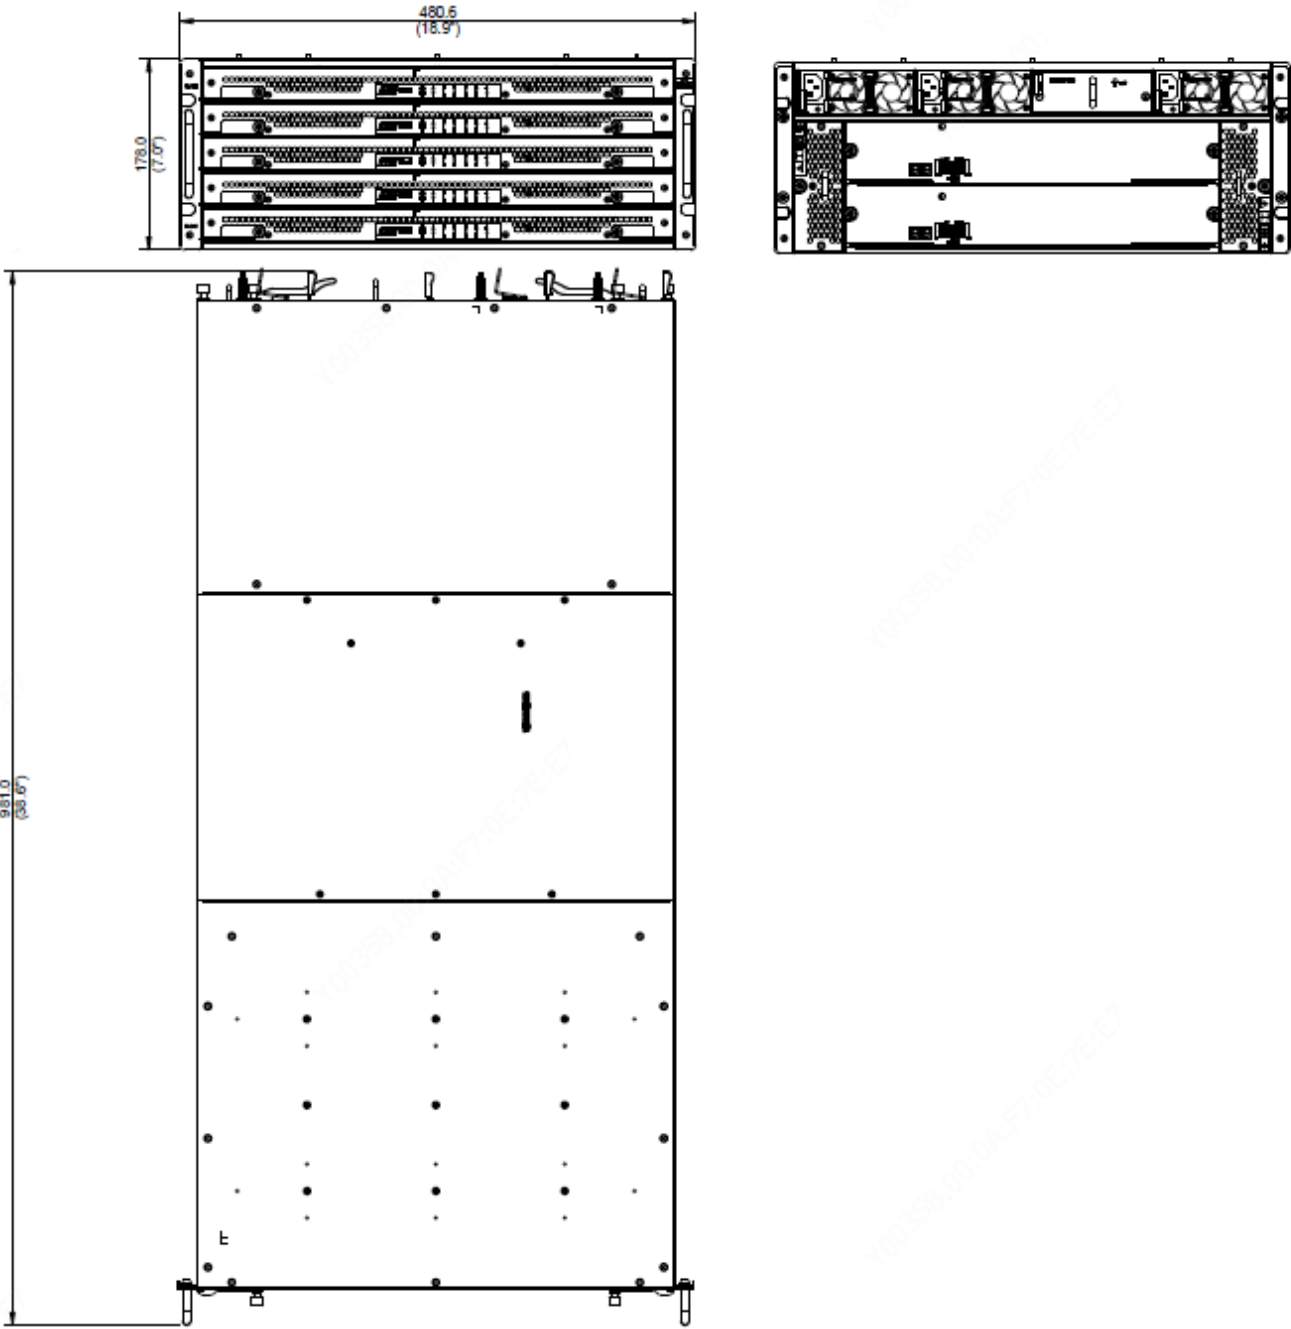

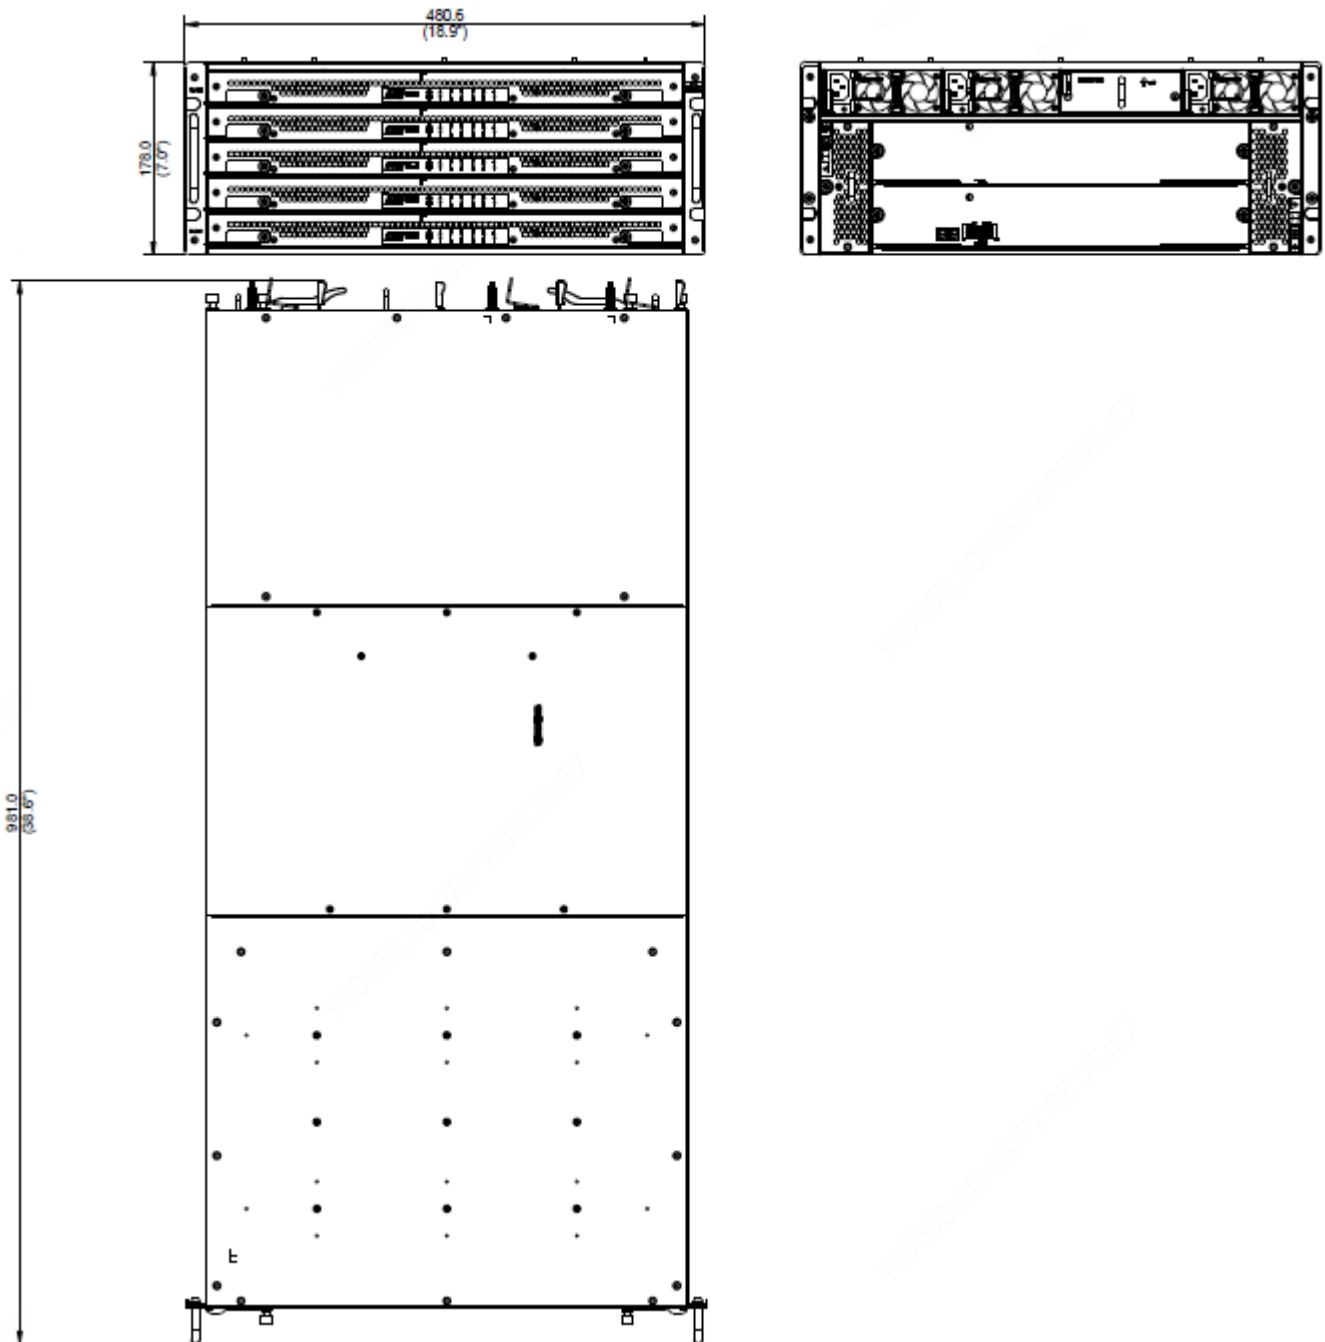

DE3160-V2@S



Galaxy[®]
SECURITY



-  Markham Head Office: 1-866-946-8998
7755 Warden Ave, Unit 1, Markham ON L3R 0N3, CA
-  Mississauga Branch: 1-855-999-6998
1200 Aerowood Dr, Unit 5, Mississauga ON L4W 2S7, CA