


Caractéristiques

By using U-brackets, the installation surface angle can be adjusted for convenient installation

Support horizontal and vertical installation

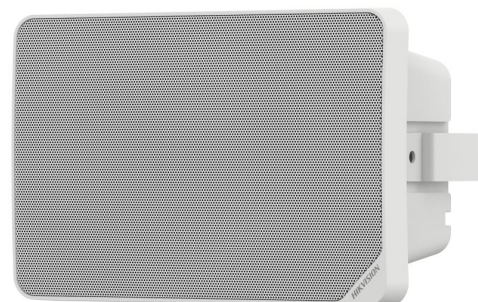

Spécification

Speaker

Rated Power 70 V: 5 W/10 W/15 W/20 W
100 V: 5 W/10 W/15 W/20 W

Impedance 8 OHM

Sensitivity(1 m, 1 W) 90 dB $\pm$ 3dB

Max. Acoustic Pressure 103 dBSPL

Direction All directions

Frequency Response 130 Hz to 17.5 kHz

Speaker Unit 5.25 $\times$ 1

Interface

Audio In Fixed pressure in 100 V/Fixed pressure in 70 V/Fixed resistance input 8 OHM $\times$ 1

General

Material Main body&Front coverplastic, bracket: metal

Operating Temperature -30 $^{\circ}$ C to 60 $^{\circ}$ C (-22 $^{\circ}$ F to 140 $^{\circ}$ F)

Operating Humidity 90% (No condensation)

Dimension 268.4 mm $\times$ 180.4 mm $\times$ 125.12 mm (10.57" $\times$ 7.1" $\times$ 4.93")

Package Dimension 340 mm $\times$ 306 mm $\times$ 180 mm (13.39" $\times$ 12.05" $\times$ 7.09")

Weight Approx. 1.5 kg (3.3 lb.)

Color White

With Package Weight

Approx. 2 kg (4.4 lb.)

Packing List

Device × 1
U-shaped bracket × 1 Screw pack × 1 Installation sticker × 1
Regulatory Compliance and Safety Information × 1